



Photometrics® Cascade® :1K

1004 x 1002 imaging array
8 x 8-µm pixels


The Cascade:1K camera from Photometrics® offers very high sensitivity through the use of *EM gain*. The EMCCD camera's 16-bit digitization at 10 MHz provides good dynamic range at video frame rates and higher, while the fine pitch of the detector's pixels, 8 x 8 microns, is ideally matched to the resolution of optical microscopes. The thermoelectrically cooled camera represents an excellent solution for many low-light, high-resolution applications.



Primary applications

- Spinning-disc confocal microscopy
- High-resolution FRET detection
- Time-lapse applications
- Polarization/anisotropic imaging

Features	Benefits
EM gain	Very high sensitivity Low-noise, impact-ionization process
1004 x 1002 imaging array 8 x 8-µm pixels	Resolves fine detail Ideally matched to optical microscope
16-bit digitization	Wide dynamic range allows detection of bright and dim signals in the same image
Frame-transfer EMCCD	100% duty cycle to collect continuous data No mechanical shutter required
Thermoelectric cooling	Reduces background for high sensitivity
C-mount	Easily attaches to microscopes, standard lenses, or optical equipment
Acquisition software	Captures, analyzes, and saves high-resolution images
PCI interface	High-bandwidth, uninterrupted data transfer
PVCAM® Circular buffers Device sequencing	Supported by numerous third-party software packages Real-time focus Precise integration with shutters, filter wheels, etc. <i>Compatible with Windows® XP/Vista 32, Mac OS X, and Linux® (kernel versions 2.4 and 2.6.8)</i>

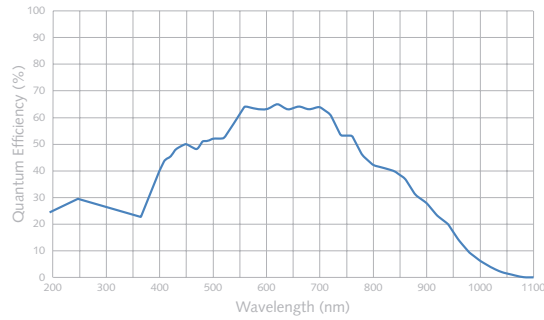

		Region		
		1004 x 1002	502 x 501	251 x 250
Binning	1 x 1	9	18	33
	2 x 2	18	33	61
	3 x 3	26	48	83
	4 x 4	33	61	103

(Frames per second)

Note: Frame rates are measured at 10 MHz with 0-second exposure times.

Specifications	
EMCCD image sensor	Texas Instruments TC285; front-illuminated, frame-transfer CCD with EM gain
EMCCD format	1004 x 1002 imaging pixels; 8 x 8- μ m pixels; 8.0 x 8.0-mm imaging area (optically centered)
Linear full well single pixel	30,000 e-
Digitizer type	16 bits @ 10 MHz
EM gain	Software selectable; minimum achievable gain: 200x
Read noise	~15 e- rms @ 10 MHz <i>Read noise effectively reduced to <1 e- rms with EM gain enabled</i>
Frame readout	110 ms/frame; 1 ms (image-to-storage shift time)
EMCCD temperature	-30°C (regulated)
Dark current	0.5 e-/p/s @ -30°C
Binning	Full binning capabilities in parallel direction; 1, 2, 3, 4, and 8 binning in serial direction
Operating environment	0 to 30°C ambient, 0 to 80% relative humidity noncondensing

Note: Specifications are typical and subject to change.

Cascade, Photometrics, and PVCAM are registered trademarks of Photometrics. Linux is a registered trademark of Linus Torvalds. Mac OS is a trademark of Apple Computer, Inc., registered in the U.S. and other countries. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers.



www.photomet.com

info@photomet.com

USA +1.520.889.9933

Asia Pacific +65.6841.2094

France +33.1.60.86.03.65

Germany +49.89.660.779.3

Japan +81.3.5639.2731

UK +44.1628.890858