


 The logo for Photometrics CoolSNAP EZ, featuring the brand name in a stylized blue font with 'EZ' in a larger, bold font below it.

1392 x 1040 imaging array  
6.45 x 6.45- $\mu\text{m}$  pixels

The CoolSNAP EZ Monochrome camera from Photometrics® delivers fast, high-resolution imaging for low-light life sciences applications. This moderately cooled CCD camera provides 12-bit digitization at 20 MHz. The fine pitch of the pixels is ideally matched to the resolution of optical microscopes. Megapixel resolution and small pixels allow imaging of very fine detail, yet the pixels can be easily binned to utilize the full dynamic range and increase signal-to-noise performance. Advanced interline-transfer CCD technology provides high quantum efficiency, most notably in the near-infrared (NIR) portion of the spectrum.

**Primary applications**
**Fixed-cell imaging**
**Immunofluorescence**
**FISH**
**Ion concentration imaging**
**Near-infrared (NIR) DIC**

Features	Benefits
20-MHz readout	High-speed, high-sensitivity readout
1392 x 1040 imaging array 6.45 x 6.45- $\mu\text{m}$ pixels	Resolves fine detail Ideally matched to optical microscope
Interline-transfer, progressive-scan CCD	Electronic shuttering eliminates camera vibration and facilitates fast triggering
Flexible binning and readout	Increases signal-to-noise performance while increasing the frame rate
IEEE-1394a or PCI interface	High-bandwidth, uninterrupted data transfer with no dropped frames
12-bit digitization	Quantifies bright and dim signals in the same image
Thermoelectric cooling	Low dark current allows longer integration times
Enhanced quantum efficiency	Provides higher sensitivity than typical interline cameras (especially in the NIR)
C-mount	Easily attaches to microscopes, standard lenses, or optical equipment
Subcompact, fanless design	Low profile allows easy integration
Acquisition software	Captures, analyzes, and saves high-resolution images
PVCam® Circular buffers Device sequencing	Supported by numerous third-party software packages Real-time focus Precise integration with shutters, filter wheels, etc.
IEEE-1394a compatibility PCI compatibility	Windows® XP/Vista 32 and Mac OS X Windows XP/Vista 32, Mac OS X, and Linux® (kernel versions 2.4 and 2.6.8)

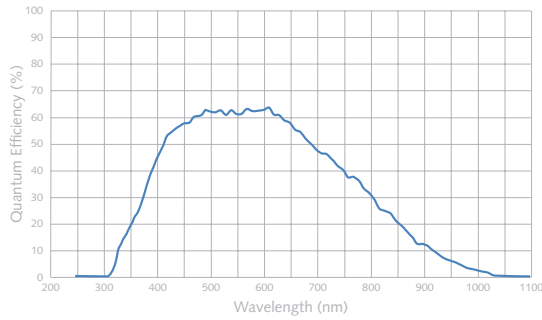

Binning	Region		
	1392 x 1040	512 x 512	256 x 256
1 x 1	10	20	36
2 x 2	19	35	56
3 x 3	27	46	69
4 x 4	33	54	78
8 x 8	50	74	97

(Frames per second)

Note: Frame rates are measured at 20 MHz with 0-millisecond exposure times.

Specifications	
CCD image sensor	Sony® ICX285; interline-transfer, progressive-scan device with microlenses
CCD format	1392 x 1040 imaging array 6.45 x 6.45-µm pixels 8.98 x 6.71-mm imaging area (optically centered)
Grade	Sony Grade 0
System gain	3 e-/ADU
Linear full well	12,300 e- (single pixel) 24,500 e- (2 x 2 binned pixel)
Read noise	≤8 e- rms @ 20 MHz
Nonlinearity	<1%
Digitizer type	12 bits @ 20 MHz
Frame readout	96 ms/frame
CCD temperature	5°C below ambient
Dark current	1 e-/p/s
Operating environment	15 to 30°C ambient, 0 to 80% relative humidity noncondensing
Dimensions	4.5" x 5.0" x 2.5" (1.9 lbs)
I/O	TTL output while exposing (BNC connector)

Note: Specifications are typical and subject to change.

CoolSNAP is a trademark of Photometrics. Photometrics and PVCam are registered trademarks of Photometrics. Linux is a registered trademark of Linus Torvalds. Mac OS is a trademark of Apple Computer, Inc., registered in the U.S. and other countries. Sony is a registered trademark of Sony Corporation. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers.



**PHOTOMETRICS®**  
[www.photometrics.com](http://www.photometrics.com)  
 info@photometrics.com  
 tel: +1 520.889.9933